


18V LXT® LITHIUM-ION BRUSHLESS CORDLESS BARREL GRIP JIG SAW, TOOL ONLY

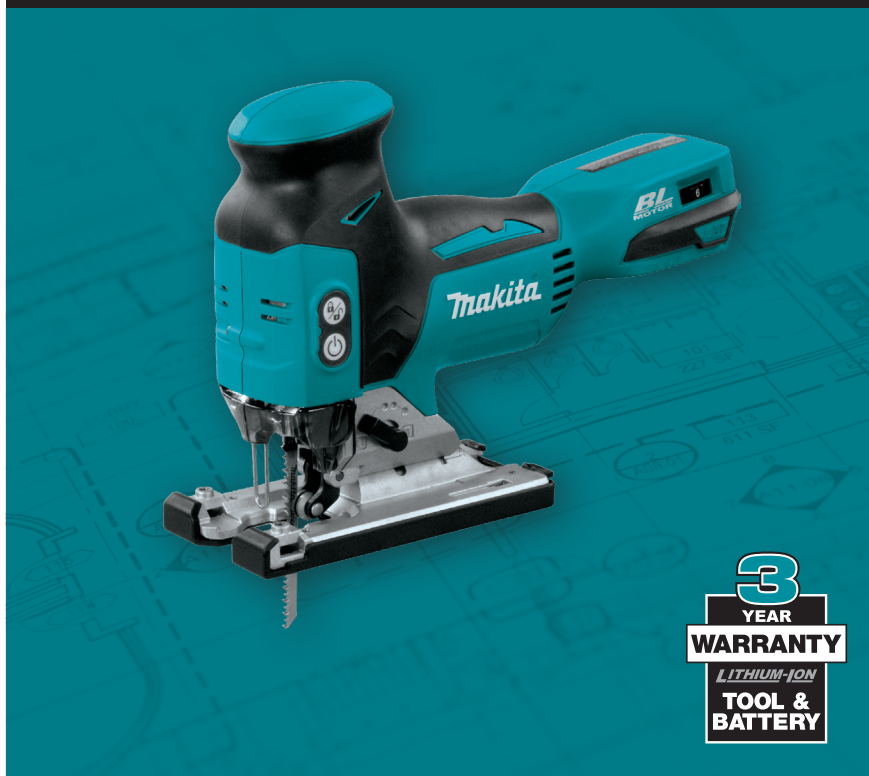

PRODUCT HIGHLIGHTS

PERFORMANCE

3 orbital settings plus straight cutting deliver faster and more accurate cuts




SPEED

Variable 6-speed control dial (800-3,500 SPM) enables user to match the speed to the application



CONVENIENCE

"Tool-less" blade change system allows for faster blade installation and removal



COMFORT

Ergonomically designed barrel grip allows for closer-to-work control and more precise cuts



RELATED PRODUCTS

1. 18V LXT® Battery and Charger Starter Pack (5.0Ah) (BL1850B2DC2X)
2. Jig Saw Blade, T Shank, HCS, 4-1/8" x 9TPI, 5/pk (792529-7)
3. Jig Saw Blade, T Shank, HSS, 3" x 24TPI, 5/pk (792473-8)
4. 18V X2 LXT® (36V) 2.1 Gallon HEPA Filter Dry Dust Extractor/Vacuum (XCV04Z)
5. Dust Nozzle (126331-0)



Makita

NEW TOOL OVERVIEW XVJ01Z

LXT® BRUSHLESS

FEATURES

- Ergonomically Designed Barrel Grip allows for Closer-to-Work Control and more Precise Cuts
- Dual L.E.D. lights illuminate the work area
- Dual ambidextrous On/Off button with separate lock button for work piece protection
- Built-in dust blower clears the line of cut for increased accuracy
- 0°- 45° left or right bevel capacity for enhanced cutting performance
- Heavy gauge aluminum base with steel plate for smooth, accurate cutting and added durability
- Rubberized soft grip handle provides increased comfort on the job
- Compact and ergonomic design at 11-3/4" long and weighing only 5.5 lbs. with battery (battery not included) for reduced operator fatigue
- Connects to Makita vacuum cleaners with optional dust accessories for a cleaner work environment

SPECIFICATIONS

Power Type	Cordless
Battery	18V LXT® Lithium-Ion
Length of Stroke	1"
Max. Cutting Capacity at 90° (wood)	5-5/16"
Max. Cutting Capacity at 90° (mild steel)	3/8"
Max. Cutting Capacity at 90° (aluminum)	25/32"
Strokes Per Minute (variable speed)	800 - 3,500 SPM
Blade Shank	"T" Tang
Overall Length	11-3/4"
Net Weight (with battery)	5.5 lbs.
UPC Code	088381-843935

STANDARD EQUIPMENT

- Anti-Splintering Insert (415524-7)
- Cover Plate (417852-6)
- Hex Wrench (783202-0)
- Jig Saw Blade